# TECHNICAL DATASHEET



## **Nuclear Cloth Tape**

### **▶** Product Description

PE coated cloth tape with a rubber based adhesive.


Multiple uses in construction, operation and maintenance of power plants and ships.

#### ▶ TECHNICAL DATA

backing : PE coated cloth adhesive-base : Natural rubber : 0.3 total thickness ( mm ) peel adhesion ( kg/25mm ) : 1 rewinding force (kg/50mm) : 2 tensile strength (kg/25mm) : 13 holding power (  $25mm \times 25mm / 40^{\circ}$  ) : 20min ball tack ( cm / ball no. 20 ) : 10 heat resistance ( $^{\circ}$ C) : 40 application temperature : 5 ~ 35 : 6 months storage life (  $20^{\circ}$  /  $60^{\circ}$  )

The used test methods are based on acceptable specifications like PSTC or internal test methods which are required on request.

#### **▶ PRODUCT DESIGN**

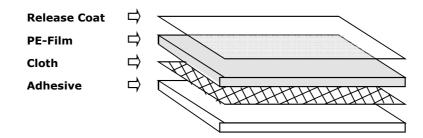

#### REMARK:

All the technical data are average values. We advice to test the material required to ensure the suitability of intended application. The company reserves the right to improve products and change specifications which may alter performance.





