



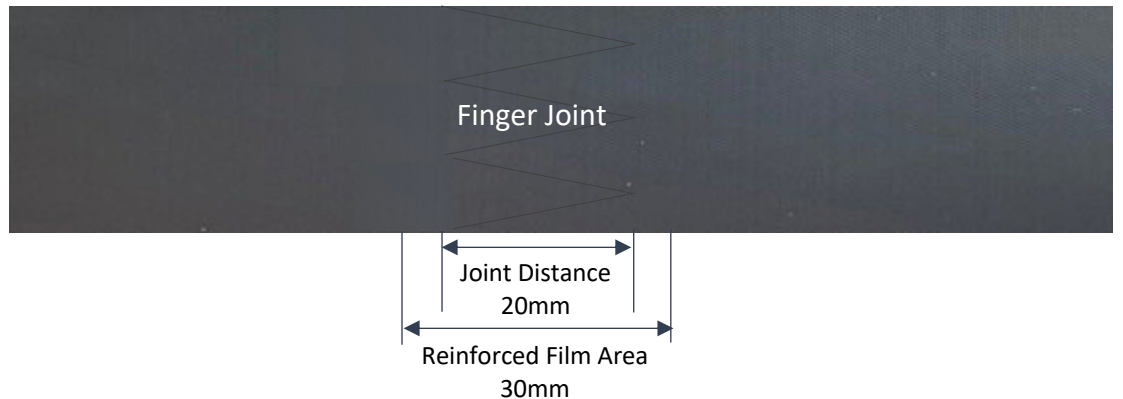

Size (mm)	Thickness (mm)
7.5 x 4000	0.25
8 x 660	0.25
9.5 x 1010	0.25
9.5 x 3230	0.25
10 x 650	0.25
10 x 1025	0.25
10 x 1080	0.25
10 x 1120	0.25
11 x 2000	0.25
12 x 1120	0.25
12 x 1220	0.25
12.7 x 1100	0.25
13 x 1080	0.25
13 x 1100	0.25
13 x 1120	0.25
13 x 1205	0.25
13 x 1220	0.25
14 x 746	0.25
15 x 610	0.25
15 x 750	0.25
15 x 810	0.25
15 x 1020	0.25
15 x 1175	0.25
15 x 1205	0.25
15 x 1250	0.25
15 x 1373	0.25
15 x 1390	0.25
16 x 750	0.25
16 x 770	0.25
16 x 805	0.25
16 x 1022	0.25
18 x 1125	0.25
20 x 1140	0.25
25 x 1040	0.25
25 x 1400	0.25
25 x 2400	0.25
25 x 3800	0.25
25.4 x 3119	0.25
25.4 x 3258	0.25
25.4 x 3798	0.25
29 x 3480	0.25
30 x 1420	0.25
30 x 2000	0.25
30 x 3090	0.25
44.5 x 1460	0.25
50 x 1100	0.25
120 x 1120	0.25

PTFE Teflon Coated Glass Fabric Continuous Heat Sealing Bands are made of 2 ply of PTFE Teflon Coated Fiberglass Fabrics. These belts are available in 2 versions that is natural brown and anti-static black. Using anti-static black version would allow a more consistent heat transfer with lower energy as it absorbs heat quicker, thus save cost on energy if the operations last longer hours.

Our heat sealing bands are tougher as the more reliable twisted yarn is used and at the joint are a tough reinforcing film is added to make the belt joint to near invisible.

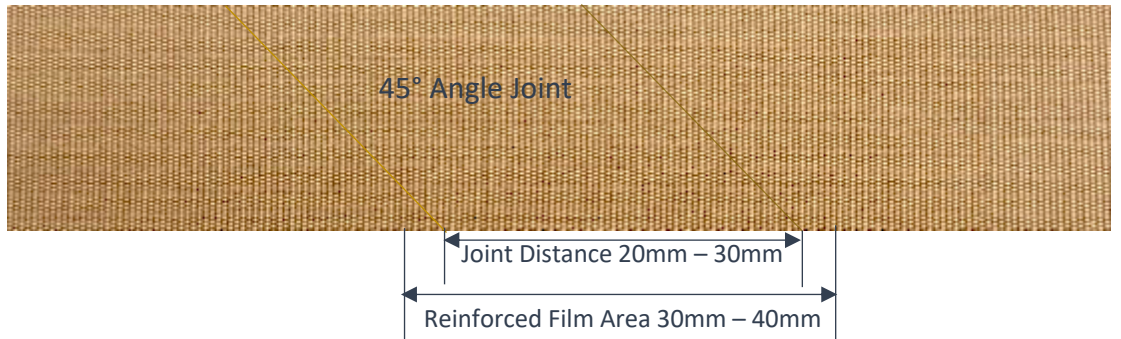

Our PTFE Teflon fiberglass coated fabric continuous heat sealing band are supplied in either 45° angle joint or a 20mm length finger, unless specified at the time of order.